

MODIAGRAM

vo.2e 2014/06/28

easy creation of molecular orbital diagrams

Clemens NIEDERBERGER

<https://bitbucket.org/cgnieder/modiagram/>

contact@mychemistry.eu

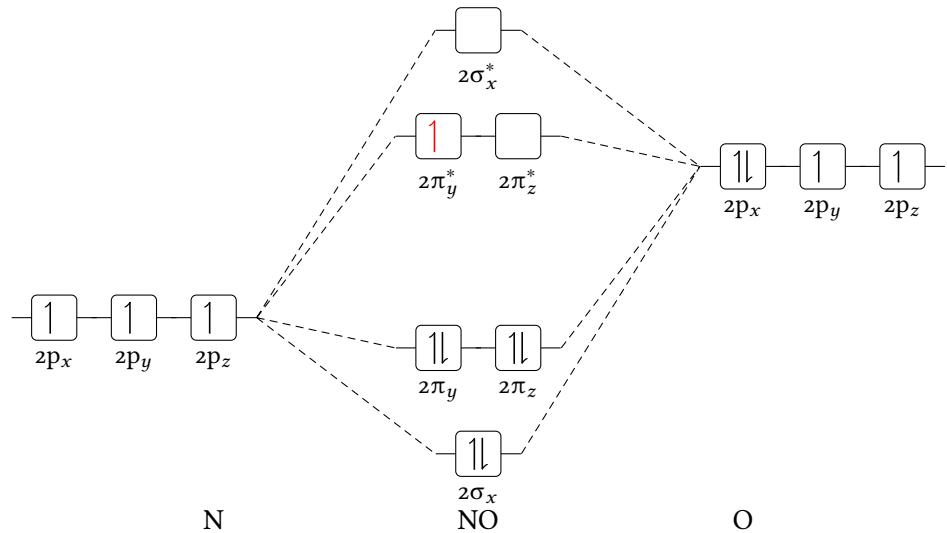


Table of Contents

1 Licence, Requirements	2	4 Customization	14
2 Motivation	2	4.1 Environment Options	14
3 Main Commands	2	4.1.1 Option <i>style</i>	15
3.1 The <code>\atom</code> Command	2	4.1.2 Option <i>distance</i>	17
3.2 The <code>\molecule</code> Command	5	4.1.3 Option <i>A0-width</i>	17
3.3 The Naming Scheme	8	4.1.4 Optionen <i>el-sep</i> , <i>up-el-pos</i> und <i>down-el-pos</i>	17
3.4 Placing AOs and MOs Arbitrarily	9	4.1.5 Option <i>lines</i>	19
3.5 The Positioning Scheme	13	4.1.6 Option <i>names</i>	19
3.6 Default Values	13	4.1.7 Options <i>names-style</i> and <i>names-style-add</i>	20

4.1.8	Option <code>labels</code>	22	4.3.2	The <code>color</code> Key	26
4.1.9	Option <code>labels-fs</code>	22	4.3.3	The <code>up-el-pos</code> and <code>down-el-pos</code> Keys	26
4.1.10	Option <code>labels-style</code>	23	4.4	Energy Axis	26
4.2	\atom and \molecule Specific Customizations	23	5	Examples	27
4.2.1	The <code>label</code> Key	23	5	References	31
4.2.2	The <code>color</code> Key	25	4.3.1	The <code>label</code> Key	26
4.2.3	The <code>up-el-pos</code> and <code>down-el-pos</code> keys	25	4.4	Index	32
4.3	\AO Specific Customizations	25			

1 Licence, Requirements

Permission is granted to copy, distribute and/or modify this software under the terms of the `LATEX` Project Public License (`LPPL`), version 1.3 or later (<http://www.latex-project.org/lppl.txt>). The software has the status “maintained.”

`MODIAGRAM` uses `l3kernel` [The13a] and `l3packages` [The13b]. It also uses `TikZ` [Tan10] and the package `chemgreek` from the `chemmacros` [Nie14] bundle. Additionally the `TikZ` libraries `calc` and `arrows` are loaded. Knowledge of `TikZ` is helpful.

2 Motivation

This package has been written as a reaction to a question on <http://tex.stackexchange.com/>. To be more precise: as a reaction to the question “Molecular orbital diagrams in `LaTeX`.” There it says

I’m wondering if anyone has seen a package for drawing (qualitative) molecular orbital splitting diagrams in `LaTeX`? Or if there exist any packages that can be easily re-purposed to this task?

Otherwise, I think I’ll have a go at it in `TikZ`.

The problem was solved using `TikZ`, since no package existed for that purpose. For one thing `MODIAGRAM` is intended to fill this gap. I also found it very tedious, to make all this copying and pasting when I needed a second, third, ... diagram. `MODIAGRAM` took care of that.

3 Main Commands

All molecular orbital (MO) diagrams are created using the environment `M0diagram`.

3.1 The `\atom` Command

`\atom[\langle name\rangle]{\langle left\rangle|\langle right\rangle}{\langle AO-spec\rangle}`

Place an AO in the diagram. `\atom` is caption of the atom, `\langle left\rangle` and `\langle right\rangle` determine the placement in the diagram, `\langle AO-spec\rangle` is the specification of the AO.

Let's take a look at an example:

```

1 \begin{M0diagram}
2   \atom{right}{}
3     1s = { 0; pair} , + + -
4     2s = { 1; pair} , \#
5     2p = {1.5; up, down } \#
6   }
7 \end{M0diagram}

```

As you can see, the argument $\langle AO\text{-spec} \rangle$ is essential to create the actual orbitals and the electrons within. You can use these key/value pairs to specify what you need:

1s = { $\langle rel\text{-energy} \rangle$; $\langle el\text{-spec} \rangle$ }

Energy level and electron specifications for the 1s orbital.

2s = { $\langle rel\text{-energy} \rangle$; $\langle el\text{-spec} \rangle$ }

Energy level and electron specifications for the 2s orbital.

2p = { $\langle rel\text{-energy} \rangle$; $\langle x el\text{-spec} \rangle$, $\langle y el\text{-spec} \rangle$, $\langle z el\text{-spec} \rangle$ }

Energy level and electron specifications for the 2p orbitals.

$\langle el\text{-spec} \rangle$ can have the values `pair`, `up` and `down` or can be left empty. $\langle rel\text{-energy} \rangle$ actually is the y coordinate and shifts the AO vertically by $\langle rel\text{-energy} \rangle$ cm.

The argument $\langle left \rangle / \langle right \rangle$ is important, when p orbitals are used. For instance compare the following example to the one before:

```

1 \begin{M0diagram}
2   \atom{left}{}
3     1s = { 0; pair} , + + -
4     2s = { 1; pair} , \#
5     2p = {1.5; up, down } \#
6   }
7 \end{M0diagram}

```

When both variants are used one can also see, that the right atom is shifted to the right (hence the naming). The right atom is shifted by 4 cm per default and can be adjusted individually, see page 17.

```

1 \begin{M0diagram}
2   \atom{left}{}
3     1s = { 0; pair} ,
4     2s = { 1; pair} ,
5     2p = {1.5; up, down }
6   }
7   \atom{right}{}
8     1s = { 0; pair} ,

```

```

9      2s = { 1; pair} ,
10     2p = {1.5; up, down }
11   }
12 \end{M0diagram}

```



With the command `\molecule` (section 3.2) the reason for the shift becomes clear.

Any of the arguments for the AO can be left empty or be omitted.

Without argument: default height, full:

```

1 Without argument: default height, full
  :\par
2 \begin{M0diagram}
3   \atom{left}{1s, 2s, 2p}           +
4 \end{M0diagram}

```



empty argument: default height, empty:

```

1 empty argument: default height, empty
  :\par
2 \begin{M0diagram}
3   \atom{left}{1s=, 2s=, 2p=}       =
4 \end{M0diagram}

```



using some values:
 — + —

```

1 using some values:\par
2 \begin{M0diagram}
3   \atom{left}{1s, 2s=1, 2p={; , up} }
4 \end{M0diagram}
```

—

¶

3.2 The `\molecule` Command


`\molecule[⟨name⟩]{⟨MO-spec⟩}`

Place a MO in the diagram. *⟨name⟩* is caption of the molecule, *⟨MO-spec⟩* is the specification of the MO.

An example first:

```

1 \begin{M0diagram}
2   \atom{left} { 1s = { 0; up } }
3   \atom{right}{ 1s = { 0; up } }
4   \molecule { 1sMO = {.75; pair } }
5 \end{M0diagram}
```



The command `\molecule` connects the AOs with the bonding and anti-bonding MOs. `\molecule` can only be used *after* one has set *both* atoms since the orbitals that are to be connected must be known.

The argument *⟨MO-spec⟩* accepts a comma separated list of key/value pairs:

1sMO = {⟨energy gain⟩/⟨energy loss⟩; ⟨s el-spec⟩, ⟨s* el-spec⟩}
 connects the AOs specified by *1s*.

2sMO = {⟨energy gain⟩/⟨energy loss⟩; ⟨s el-spec⟩, ⟨s* el-spec⟩}
 connects the AOs specified by *2s*

2pMO = {⟨s energy gain⟩/⟨s energy loss⟩, ⟨p energy gain⟩/⟨p energy loss⟩; ⟨s el-spec⟩, ⟨py el-spec⟩,
 ⟨pz el-spec⟩, ⟨py* el-spec⟩, ⟨pz* el-spec⟩, ⟨s* el-spec⟩}
 connects the AOs specified by *2p*.

Obviously the regarding AOs must have been set in order to connect them. This for example won't work:

```

1 \begin{M0diagram}
2   \atom{left} { 1s = 0 }
3   \atom{right}{ 1s = 0 }
4   \molecule { 2sMO = .75 }
5 \end{M0diagram}


```

The value used in $\langle\text{energy gain}\rangle$ determines how many cm the bonding MO lies below the lower AO or how many cm the anti-bonding MO lies above the higher AO.

```

1 same level:\par
2 \begin{M0diagram}
3   \atom{left} { 1s = { 0; up } }
4   \atom{right}{ 1s = { 0; up } }
5   \molecule { 1sMO = {.75; pair } }
6 \end{M0diagram}
7
8 different levels:\par
9 \begin{M0diagram}
10  \atom{left} { 1s = { 0; up } }
11  \atom{right}{ 1s = { 1; up } }
12  \molecule { 1sMO = {.25; pair } }
13 \end{M0diagram}

```




If you specify $\langle\text{energy loss}\rangle$ you can create non-symmetrical splittings. Then, the first value ($\langle\text{energy gain}\rangle$) is used for the bonding MO and the second value ($\langle\text{energy loss}\rangle$) is used for the anti-bonding MO.

```

1 \begin{M0diagram}
2   \atom{left} { 1s = { 0; up } }
3   \atom{right}{ 1s = { 0; up } }
4   \molecule { 1sMO = {.75/.25; pair } }
5 \end{M0diagram}
6
7 \begin{M0diagram}
8   \atom{left} { 1s = { 0; up } }
9   \atom{right}{ 1s = { 1; up } }
10  \molecule { 1sMO = {.25/.75; pair } }
11 \end{M0diagram}

```




Please be aware, that you have to specify *two* such values or pairs with **2pMO**: the splitting of the σ orbitals and the splitting of the π orbitals.

```

1 \begin{MOdiagram}
2   \atom{left}{ 2p = { 0; up, up } }
3   \atom{right}{ 2p = { 1; up, up } }
4   \molecule{ 2pMO = { 1.5, .75; pair, up, up } }
5 \end{MOdiagram}

```

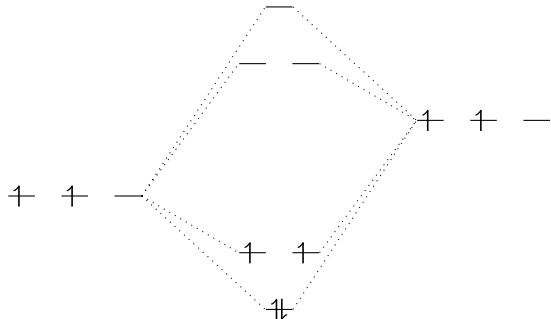


The complete MO diagram for triplet dioxygen now could look something like that:

```


1 \begin{MOdiagram}
2   \atom{left} {
3     1s, 2s, 2p = {;pair,up,up}
4   }
5   \atom{right} {
6     1s, 2s, 2p = {;pair,up,up}
7   }
8   \molecule{
9     1sMO, 2sMO, 2pMO = {;pair,pair,pair,up,up}
10  }
11 \end{MOdiagram}

```

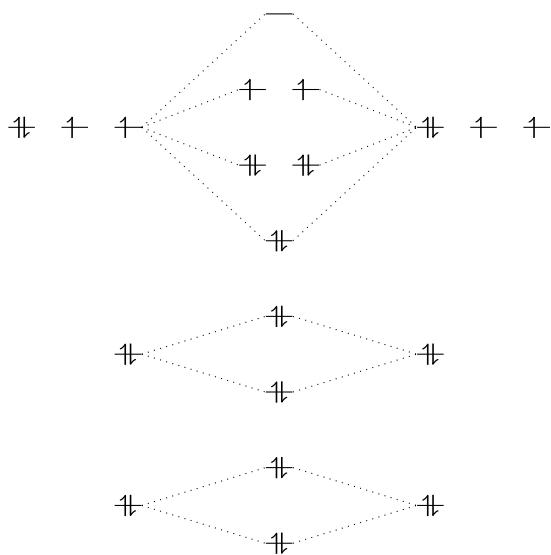

3.3 The Naming Scheme

Since one wants to be able to put labels to the orbitals and since they are nodes in a `tikzpicture`, the internal naming scheme is important. It closely follows the function:

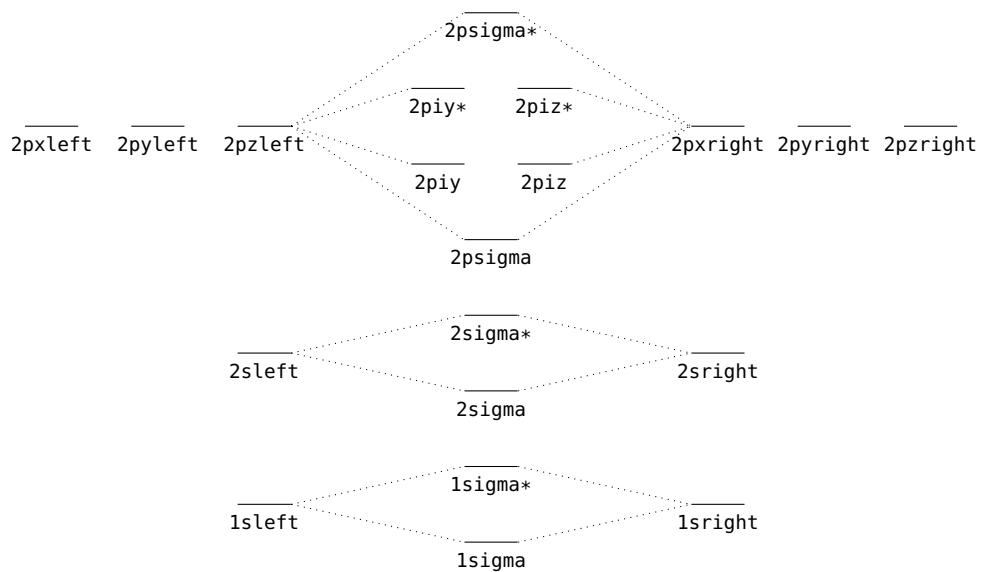


With these names it is possible to reference the orbitals with the known TikZ commands:

```

1 \begin{M0diagram}
2   \atom{left} { 1s = 0 }
3   \atom{right}{ 1s = 0 }
4   \molecule { 1sMO = .75 }
5   \draw[<->,red,semithick]
6     (1sigma.center) -- (1sigma*.center)
7   ) ;
8   \draw[red]
9     (1sigma*) ++ (2cm,.5cm) node {
      splitting} ;
9 \end{M0diagram}


```

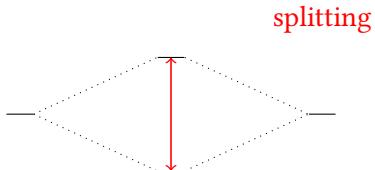

```


1 \begin{M0diagram}
2   \atom{left} { 1s = 0 }
3   \atom{right}{ 1s = 0 }
4   \molecule { 1sMO = .75 }
5   \draw[draw=blue,very thick,fill=blue!40,opacity=.5]
6     (1sigma*) circle (8pt);
7   \draw[<-,shorten <=8pt,shorten >=15pt,blue]
8     (1sigma*) --+(2,1) node {anti-bonding MO};
9 \end{M0diagram}

```

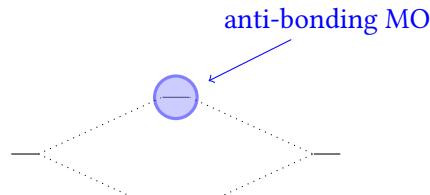

3.4 Placing AOs and MOs Arbitrarily

The standard orbitals are not always sufficient in order to draw a correct MO diagram. For example in the MO diagram of XeF_2 one would need the part that illustrates the interaction between the bonding and anti-bonding combination of two p orbitals of Flourine with one p orbital of Xenon:

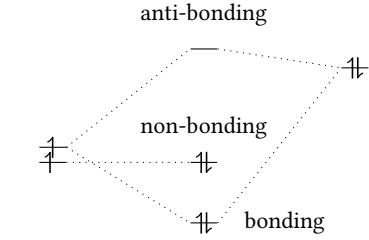

To create diagrams like this there is the following command, which draws a single AO:

```
\AO[<name>]{<xshift>}[<type>][<options>]{<energy>; <el-spec>}
```

Place an AO in the diagram. *<name>* (optional) is the name of the node; if not specified, *A0#* is used where # is a consecutive number. *<xshift>* is the vertical position of the orbital(s), a *TeX* dimension. *<type>* can be s or p. *<options>* is a list of key/value pairs with which the AO can be customized, see section 4.3. *<AO-spec>* is the specification of the AO.

Depending on the *<type>* one s or three p orbitals are drawn.

```
1 \begin{M0diagram}
2   \AO{s}{0;}
3   \AO(-20pt){p}{1;pair,up,down}
4 \end{M0diagram}
```

If one wants to place such an AO at the position of an atom, one has to know their *<xshift>*. They have predefined values (also see section 3.5):

- atom left: 1 cm
- molecule: 3 cm
- atom right: 5 cm

```
1 \begin{M0diagram}
2   \atom{left}{1s=0}
3   \atom{right}{1s=0}
4   \molecule{1sM0=1}
5   \AO(1cm){s}{2}
6   \AO(3cm){s}{2}
7   \AO(5cm){s}{2}
8 \end{M0diagram}
```

Within the p orbitals there is an additional shift by 20 pt per orbital. This is equivalent to a double shift by the length *A0-width* (see section 4.1.3):

```

1 \begin{M0diagram}
2   \atom{left} {2p=0}
3   \atom{right}{2p=0}
4   % above the left atom:
5   \AO(1cm)    {s}{ .5}
6   \AO(1cm-20pt){s}{ 1;up}
7   \AO(1cm-40pt){s}{1,5;down}
8   % above the right atom:
9   \AO(1cm)    {s}{ .5}
10  \AO(5cm+20pt){s}{ 1;up}
11  \AO(5cm+40pt){s}{1.5;down}
12 \end{M0diagram}

```




The AOs created with `\AO` also can be connected. For this you can use the *TikZ* command `\draw`, of course. You can use the predefined node names...

```

1 \begin{M0diagram}
2   \AO{s}{0} \AO(2cm){s}{1}
3   \AO{s}{2} \AO(2cm){s}{1.5}
4   \draw[red] (A01.0) -- (A02.180) (A03.0) -- (A04.180);
5 \end{M0diagram}

```




... or use own node names

```

1 \begin{M0diagram}
2   \AO[a]{s}{0} \AO[b](2cm){s}{1}
3   \AO[c]{s}{2} \AO[d](2cm){s}{1.5}
4   \draw[red] (a.0) -- (b.180) (c.0) -- (d.180);
5 \end{M0diagram}

```




The predefined names are A01, A02 *etc.* for the type s and A01x, A01y, A01z, A02x *etc.* for the type p. Nodes of the type p get an x, y or z if you specify your own name, too.

```

1 \begin{M0diagram}
2   \AO{p}{0}
3   \draw[<-,shorten >=5pt] (A01y.-90) -- ++ (.5,-1) node {y};
4 \end{M0diagram}
5 and
6 \begin{M0diagram}
7   \AO[A]{p}{0}
8   \draw[<-,shorten >=5pt] (Ay.-90) -- ++ (.5,-1) node {y};
9 \end{M0diagram}

```



However, if you want the lines to be drawn in the same style as the ones created by \molecule,¹ you should use the command \connect.

\connect{\langle AO-connect\rangle}


Connects the specified AOs. *\langle AO-connect\rangle* is comma separated list of node name pairs connected with &.

This command expects a comma separated list of node name pairs that are to be connected. The names have to be connected with a &:

```

1 \begin{M0diagram}
2   \AO{s}{0;} \AO(2cm){s}{1;}
3   \AO{s}{2;} \AO(2cm){s}{1.5;};
4   \connect{ A01 & A02, A03 & A04 }
5 \end{M0diagram}

```




Some things still need to be said: \connect adds the anchor east to the first name and the anchor west to the second one. This means a connection only makes sense from the left to the right. However, you can add own anchors using the usual TikZ way:

1. which can be customized, see page 19

```


1 \begin{tikzpicture}
2   \draw (0,0) node (a) {a} ++ (1,0) node (b) {b}
3     ++ (0,1) node (c) {c} ++ (-1,0) node (d) {d} ;
4   \connect{ a.90 & d.-90, c.180 & d.0 }
5 \end{tikzpicture}

```



3.5 The Positioning Scheme

The figure below shows the values of the x coordinates of the orbitals depending on the values of $\langle \text{distance} \rangle$ ($\langle \text{dist} \rangle$) and $\langle \text{AO-width} \rangle$ ($\langle \text{AO} \rangle$). In sections 4.1.2 and 4.1.3 these lengths and how they can be changed are discussed.

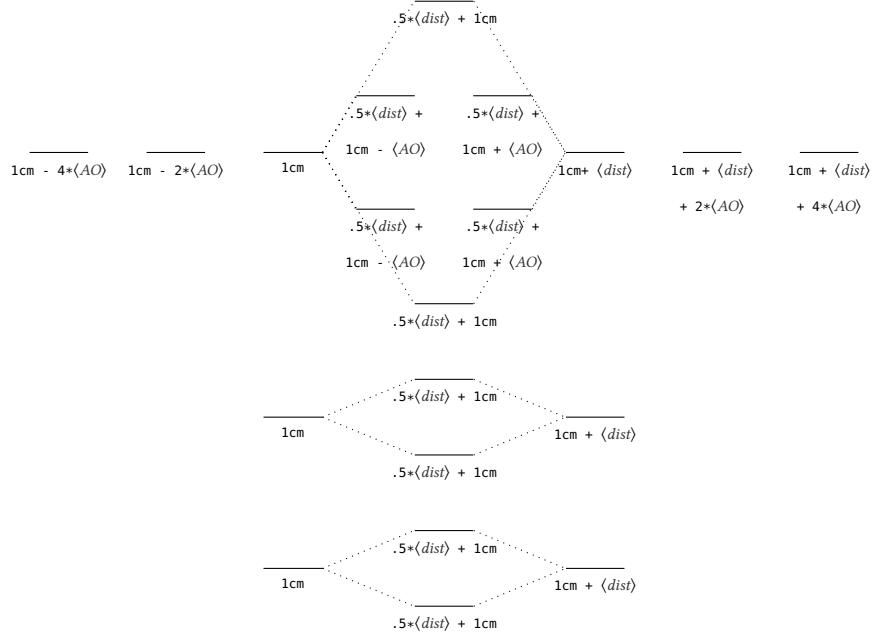

3.6 Default Values

If you leave the arguments (or better: values) for the specification of the AO or MO empty or omit them, default values are used. The table below shows you, which ones.

AO/MO	omitted	empty
syntax:	1s	1s=
1s	{0;pair}	{0;}
2s	{2;pair}	{2;}
2p	{5;pair,pair,pair}	{5;,,}
1sM0	{.5;pair,pair}	{.5;,}
2sM0	{.5;pair,pair}	{.5;,}
2pM0	{1.5,.5;pair,pair,pair,pair,pair}	{1.5,.5;,,,,,}

This is similar for the \AO command (page 9); it needs a value for $\langle energy \rangle$, though.

$\langle type \rangle$	$\langle el-spec \rangle$
s	pair
p	pair,pair,pair

Compare these examples:

```

1 \begin{M0diagram}
2   \atom{left} { 1s={0;pair} }
3   \atom{right}{ 1s }
4 \end{M0diagram}          ¶          ¶
5
6 \rulefill
7
8 \begin{M0diagram}
9   \atom{left}{ 1s=1 }
10  \atom{right}{ 1s= }
11 \end{M0diagram}          —

```

4 Customization

The options of the section 4.1 can be set global as package option, *i. e.*, with `\usepackage[⟨options⟩]{modiagram}`, or via the setup command `\M0setup{⟨options⟩}`.

4.1 Environment Options

There are some options with which the layout of the MO diagrams can be changed:

`style = {⟨type⟩}`
change the style of the orbitals and the connecting lines, section 4.1.1.

`distance = {⟨dim⟩}`
distance between left and right atom, section 4.1.2.

`A0-width = {⟨dim⟩}`
change the width of orbitals, section 4.1.3.

el-sep = {⟨num⟩}

distance between the electron pair arrows, section 4.1.4.

up-el-pos = {⟨num⟩}

position of the spin-up arrow, section 4.1.4.

down-el-pos = {⟨num⟩}

position of the spin-down arrow, section 4.1.4.

lines = {⟨tikz⟩}

change the TikZ style of the connecting lines, section 4.1.5.

names = true|false

add captions to the atoms and the molecule, section 4.1.6.

names-style = {⟨tikz⟩}

change the TikZ style of the captions, section 4.1.7.

names-style-add = {⟨tikz⟩}

change the TikZ style of the captions, section 4.1.7.

labels = true|false

add default labels to the orbitals, section 4.1.8.

labels-fs = {⟨cs⟩}

change the font size of the labels, section 4.1.9.

labels-style = {⟨tikz⟩}

change the TikZ style of the labels, section 4.1.10.

They all are discussed in the following sections. If they're used as options for the environment, they're set locally and only change that environment.

```

1 \begin{M0diagram}[options]
2 ...
3 \end{M0diagram}

```

4.1.1 Option **style**

There are five different styles which can be chosen.

- **style** = {plain} ↗ (default)
- **style** = {square} ↗
- **style** = {circle} ↗
- **style** = {round} ↗


- `style = {fancy}` 

Let's take the MO diagram of H₂ to illustrate the different styles:

```

1 % use package `chemmacros'
2 \begin{M0diagram}[style=plain]%
3   default
4   \atom[H]{left} { 1s = {;up} }
5   \atom[H]{right}{ 1s = {;up} }
6   \molecule[\ch{H2}]{ 1sMO = {.75;pair}
7   } }
8 \end{M0diagram}


```



```

1 % use package `chemmacros'
2 \begin{M0diagram}[style=square]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sMO = {.75;pair}
6   } }
7 \end{M0diagram}


```



```

1 % use package `chemmacros'
2 \begin{M0diagram}[style=circle]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sMO = {.75;pair}
6   } }
7 \end{M0diagram}


```

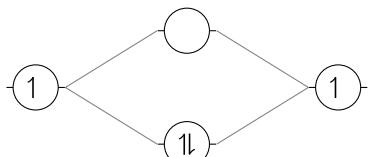

```

1 % use package `chemmacros'
2 \begin{M0diagram}[style=round]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sMO = {.75;pair}
6   } }
7 \end{M0diagram}


```



```

1 % use package `chemmacros'
2 \begin{M0diagram}[style=fancy]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sMO = {.75;pair}
6   } }
7 \end{M0diagram}

```

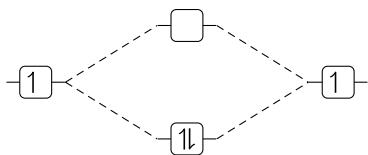


4.1.2 Option **distance**

Depending on labels and captions the 4 cm by which the right and left atom are separated can be too small. With **distance = {<dim>}** the length can be adjusted. This will change the position of the right atom to $1\text{cm} + \langle \text{dim} \rangle$ and the position of the molecule is changed to $0.5*(1\text{cm} + \langle \text{dim} \rangle)$, also see page 10 and section 3.5.

```

1 % use package `chemmacros'
2 \begin{M0diagram}[distance=6cm]
3   \atom[H]{left}{ 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sMO = {.75;pair}
    }
6 \end{M0diagram}

```




4.1.3 Option **A0-width**

The length **A0-width** sets the length of the horizontal line in a orbital displayed with the **plain** style. It's default value is 10 pt.

```

1 % use package `chemmacros'
2 \begin{M0diagram}[A0-width=15pt]
3   \atom[H]{left}{ 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sMO = {.75;pair}
    }
6 \end{M0diagram}


```



```

1 % use package `chemmacros'
2 \begin{M0diagram}[style=fancy,A0-width
  =15pt]
3   \atom[H]{left}{ 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sMO = {.75;pair}
    }
6 \end{M0diagram}

```

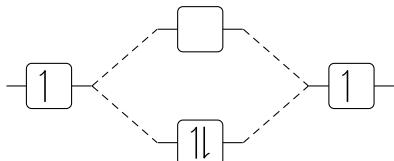

By changing the value of **A0-width** the positions of the p and the π orbitals also change, see section 3.5.


4.1.4 Optionen **el-sep**, **up-el-pos** und **down-el-pos**

These three options change the horizontal positions of the arrows representing the electrons in an AO/MO. The option **el-sep = {<num>}** needs a value between 0 and 1. 0 means *no* distance between the arrows and 1 *full* distance (with respect to the length **A0-width**, see section 4.1.3).

```

1 % use package `chemmacros'
2 \begin{M0diagram}[el-sep=.2] % default
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sMO = {.75;pair}
    } }
6 \end{M0diagram}


```



```

1 % use package `chemmacros'
2 \begin{M0diagram}[el-sep=0]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sMO = {.75;pair}
    } }
6 \end{M0diagram}


```



```

1 % use package `chemmacros'
2 \begin{M0diagram}[el-sep=1]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sMO = {.75;pair}
    } }
6 \end{M0diagram}

```




The options `up-el-pos = {<num>}` and `down-el-pos = {<num>}` can be used alternatively to place the spin-up and spin-down electron, respectively. Again they need values between 0 and 1. This time 0 means *on the left* and 1 means *on the right*.

```

1 % use package `chemmacros'
2 \begin{M0diagram}[up-el-pos=.4,down-el-pos=.6] % default
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sMO = {.75;pair} }
6 \end{M0diagram}


```



```

1 % use package `chemmacros'
2 \begin{M0diagram}[up-el-pos=.333,down-el-pos=.667]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sM0 = {.75;pair} }
6 \end{M0diagram}


```



```

1 % use package `chemmacros'
2 \begin{M0diagram}[up-el-pos=.7,down-el-pos=.3]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sM0 = {.75;pair} }
6 \end{M0diagram}

```



4.1.5 Option `lines`

The option `lines` can be used to modify the TikZ style of the connecting lines:

```

1 % use package `chemmacros'
2 \begin{M0diagram}[lines={gray,thin}]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sM0 = {.75;pair}
    }
6 \end{M0diagram}

```




4.1.6 Option `names`

If you use the option `names` the atoms and the molecule get captions provided you have used the optional `<name>` argument of `\atom` and/or `\molecule`.

```

1 % use package `chemmacros'
2 \begin{M0diagram}[names]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sMO = {.75;pair}
6 } }
\end{M0diagram}

```




4.1.7 Options `names-style` and `names-style-add`

These options enable to customize the style of the captions of the atoms and of the molecule. By default this setting is used: `names-style` = {⟨anchor=base⟩}.²

```

1 % use package `chemmacros'
2 \begin{M0diagram}[names,names-style={ draw=blue}]
3   \atom[p]{left} { 1s = {;up} }
4   \atom[b]{right}{ 1s = {;up} }
5   \molecule[\ch{X2}]{ 1sMO = {.75;pair}
6 } }
\end{M0diagram}

```




With this the default setting is overwritten. As you can see it destroys the vertical alignment of the nodes. In order to avoid that you can for example specify `text height` and `text depth` yourself ...

```

1 % use package `chemmacros'
2 \begin{M0diagram}[names,names-style={text height=1.5ex, text depth=.25ex, draw=
blue}]
3   \atom[p]{left} { 1s = {;up} }
4   \atom[b]{right}{ 1s = {;up} }
5   \molecule[\ch{X2}]{ 1sMO = {.75;pair} }
6 \end{M0diagram}

```




..., add the `anchor` again ...

². Please see “*TikZ and PGF – Manual for Version 2.10*” p. 183 section 16.4.4 (pgfmanual.pdf) for the meaning

```

1 % use package `chemmacros'
2 \begin{MOdiagram}[names,names-style={anchor=base, draw=blue}]
3   \atom[p]{left} { 1s = {;up} }
4   \atom[b]{right}{ 1s = {;up} }
5   \molecule[\ch{X2}]{ 1sM0 = {.75;pair} }
6 \end{MOdiagram}

```




... or use the option `names-style-add = {<.>}` It doesn't overwrite the current setting but appends the new declaration:

```

1 % use package `chemmacros'
2 \begin{MOdiagram}[names,names-style-add={draw=blue}]
3   \atom[p]{left} { 1s = {;up} }
4   \atom[b]{right}{ 1s = {;up} }
5   \molecule[\ch{X2}]{ 1sM0 = {.75;pair} }
6 \end{MOdiagram}

```



```


1 % use package `chemmacros'
2 \MOsetup{
3   names,
4   names-style = {
5     text height = 2.5ex,
6     text depth = .5ex,
7     draw = blue!80,
8     rounded corners
9   }
10 }

```

```

11 \begin{M0diagram}
12   \atom[p]{left} { 1s = {;up} }
13   \atom[b]{right}{ 1s = {;up} }
14   \molecule[\ch{X2}]{ 1sM0 = {.75;pair} }
15 \end{M0diagram}
16 \begin{M0diagram}[names-style-add={fill=blue!20}]
17   \atom[p]{left} { 1s = {;up} }
18   \atom[b]{right}{ 1s = {;up} }
19   \molecule[\ch{X2}]{ 1sM0 = {.75;pair} }
20 \end{M0diagram}

```

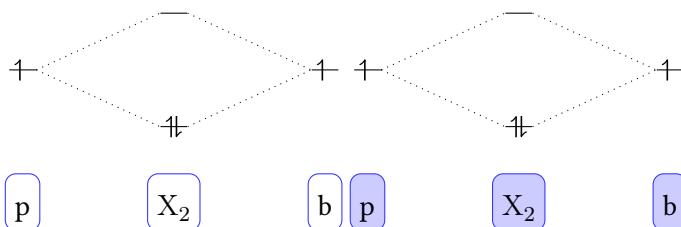


4.1.8 Option `labels`

If you use the option `labels` predefined labels are written below the orbitals. These labels can be changed, see section 4.2.1.

```

1 % use package `chemmacros'
2 \begin{M0diagram}[labels]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sM0 = {.75;pair}
    }
6 \end{M0diagram}

```




4.1.9 Option `labels-fs`

Labels are set with the font size `\small`. If you want to change that you can use the option `labels-fs`.

```

1 % use package `chemmacros'
2 \begin{M0diagram}[labels,labels-fs=\footnotesize]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sM0 = {.75;pair} }
6 \end{M0diagram}

```




This also allows you to change the font style or font shape of the labels.

```

1 % use package `chemmacros'
2 \begin{M0diagram}[labels,labels-fs=\sffamily\footnotesize]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sM0 = {.75;pair} }
6 \end{M0diagram}

```




4.1.10 Option `labels-style`

The option `labels-style` changes the Ti_kZ style of the nodes within which the labels are written.

```

1 % use package `chemmacros'
2 \begin{M0diagram}[labels,labels-style={blue,yshift=4pt}]
3   \atom[H]{left} { 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{ 1sM0 = {.75;pair} }
6 \end{M0diagram}

```



4.2 `\atom` and `\molecule` Specific Customizations


4.2.1 The `label` Key

If you don't want to use the predefined labels, change single labels or use only one or two labels, you can use the key `label`. This option is used in the `\atom` and `\molecule` commands in the

$\langle AO\text{-}spec \rangle$ or $\langle MO\text{-}spec \rangle$ argument, respectively. The key awaits a comma separated key/value list. The names mentioned in section 3.3 are used as keys to specify the AO that you want to label.


```

1 % use package `chemmacros'
2 \begin{MOdiagram}[labels=fs=\
footnotesize]
3   \atom[H]{left}{ 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{}
6     1sMO = {.75;pair},
7     label = { 1sigma = {bonding MO} }
8   }
9 \end{MOdiagram}
```



```


1 \begin{MOdiagram}[style=square,
distance=6cm]
2   \atom{left}{ 1s = {;up} }
3   \atom{right}{ 1s = {;up} }
4   \molecule{
5     1sMO = {.75;pair} ,
6     label = {
7       1sigma = \chemsigma,
8       1sigma* = \chemsigma$^*$
9     }
10   }
11   \node[right] at (1sigma.-45) {
12     bonding};
13   \node[right] at (1sigma*.45) {anti-
14     bonding};
15 \end{MOdiagram}
```

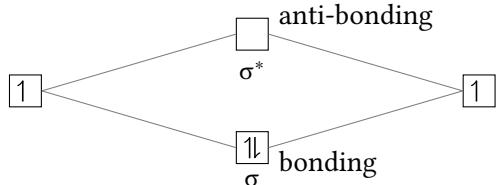

If the option is used together with the `labels` option (page 22) single labels are overwritten:

```

1 % use package `chemmacros'
2 \begin{MOdiagram}[labels]
3   \atom[H]{left}{ 1s = {;up} }
4   \atom[H]{right}{ 1s = {;up} }
5   \molecule[\ch{H2}]{}
6     1sMO = {.75;pair},
7     label = { 1sigma = \textcolor{red}{red
8     }{??} }
8   }
9 \end{MOdiagram}
```




4.2.2 The color Key

Analogous to the `label` key the `color` key can be used to display coloured electrons:

```

1 % use package `chemmacros'
2 \begin{M0diagram}[labels-fs=\
footnotesize]
3   \atom[H]{left}[
4     1s, color = { 1sleft = blue }
5   }
6   \atom[H]{right}[
7     1s, color = { 1sright = red }
8   }
9   \molecule[\ch{H2}][
10    1sMO,
11    label = { 1sigma = {bonding MO} },
12    color = { 1sigma = green, 1sigma*
13      = cyan }
14 ]
\end{M0diagram}

```



bonding MO


4.2.3 The up-el-pos and down-el-pos keys

The options `up-el-pos` and `down-el-pos` allow it to shift the arrows representing the electrons in a single AO or MO individually. You need to use values between 0 and 1, also see section 4.1.4.

```

1 % use package `chemmacros'
2 \begin{M0diagram}
3   \atom[H]{left}[
4     1s      = {;up},
5     up-el-pos = { 1sleft=.5 }
6   }
7   \atom[H]{right}{ 1s = {;up} }
8   \molecule[\ch{H2}][
9     1sMO      = {.75;pair} ,
10    up-el-pos = { 1sigma=.15 } ,
11    down-el-pos = { 1sigma=.85 }
12  ]
\end{M0diagram}

```



4.3 \AO Specific Customizations

These keys enable to customize orbitals created with `\AO`.


4.3.1 The `label` Key

The key `label` [$\langle x \rangle / \langle y \rangle / \langle z \rangle$] allows you to put a label to the AO/MO. If you use the type `p` you can specify the orbital you want to label in square brackets:

```

1 \begin{M0diagram}[style=square]
2   \AO{s}[label={s orbital}]{0}
3   \AO{p}[label[y]=py,label[z]=pz]{1.5}
4 \end{M0diagram}

```




4.3.2 The `color` Key

Analogous to the `label` key there is the key `color` [$\langle x \rangle / \langle y \rangle / \langle z \rangle$] which enables you to choose a color for the electrons. If you use the type `p` you can specify the orbital in square brackets:

```

1 \begin{M0diagram}[style=square]
2   \AO{s}[color=red]{0}
3   \AO{p}[color[y]=green,color[z]=cyan
        ]{1.5}
4 \end{M0diagram}

```




4.3.3 The `up-el-pos` and `down-el-pos` Keys

Then there are the keys `up-el-pos` [$\langle x \rangle / \langle y \rangle / \langle z \rangle$] and `down-el-pos` [$\langle x \rangle / \langle y \rangle / \langle z \rangle$] with which the electrons can be shifted horizontally. You can use values between 0 and 1, also see section 4.1.4. If you use the type `p` you can specify the orbital in square brackets:

```

1 \begin{M0diagram}[style=square]
2   \AO{s}[up-el-pos=.15]{0}
3   \AO{p}[up-el-pos[y]=.15,down-el-pos[
      z]=.15]{1.5}
4 \end{M0diagram}

```



4.4 Energy Axis


Last but not least one might want to add an energy axis to the diagram. For this there is the command `\EnergyAxis`.

`\EnergyAxis` [$\langle option \rangle$]

Adds an energy axis to the diagram. $\langle options \rangle$ are key/value pairs to modify the axis.

5 Examples

```
1 \begin{M0diagram}
2   \atom{left} { 1s = {;up} }
3   \atom{right}{ 1s = {;up} }
4   \molecule{ 1sM0 = {.75;pair} }
5   \EnergyAxis
6 \end{M0diagram}
```



For the time being there are two options to modify the axis.

title = {<title>}

Default: energy

the axis label. If used without value the default is used.


head = {<tikz arrow head>}

Default: >

the arrow head; you can use the arrow heads specified in the TikZ library `arrows` (pgfmanual v2.10 pages 256ff.)


```
1 \begin{M0diagram}
2   \atom{left} { 1s = {;up} }
3   \atom{right}{ 1s = {;up} }
4   \molecule{ 1sM0 = {.75;pair} }
5   \EnergyAxis[title]
6 \end{M0diagram}
```

energy



```
1 \begin{M0diagram}
2   \atom{left} { 1s = {;up} }
3   \atom{right}{ 1s = {;up} }
4   \molecule{ 1sM0 = {.75;pair} }
5   \EnergyAxis[title=E,head=stealth]
6 \end{M0diagram}
```

E



5 Examples


The example from the beginning of section 3.4.

5 Examples

```

1 % use package `chemmacros`
2 \begin{M0diagram}[names]
3   \atom[\ch{F}]{left}{1s=.2;up,up-el-pos={1sleft=.5}}
4   \atom[Xe]{right}{1s=1.25;pair}
5   \molecule[\ch{XeF2}]{1sM0={1/.25;pair}}
6   \AO(1cm){s}{0;up}
7   \AO(3cm){s}{0;pair}
8   \connect{ A01 & A02 }
9   \node[right,xshift=4mm] at (1sigma) {\footnotesize bonding};
10  \node[above] at (A02.90) {\footnotesize non-bonding};
11  \node[above] at (1sigma*.90) {\footnotesize anti-bonding};
12
13 \end{M0diagram}

```

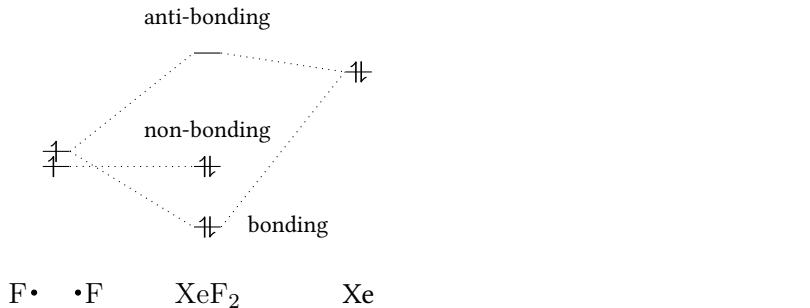

```

1 % use package `chemmacros`
2 \begin{figure}[p]
3   \centering
4   \begin{M0diagram}[style=square,labels,names,A0-width=8pt,labels-fs=\footnotesize]
5     \atom[\ch{O_a}]{left}{1s, 2s, 2p = {;pair,up,up}}
6   }
7   \atom[\ch{O_b}]{right}{1s, 2s, 2p = {;pair,up,up}}
8   }
9   \molecule[\ch{O2}]{1sM0, 2sM0, 2pM0 = {;pair,pair,pair,up,up},
10   color = { 2piy*=red, 2piz*=red }
11   }
12   \EnergyAxis
13 \end{M0diagram}
14 \caption{M0 diagram of \ch{^3 "\chemSigma- O2}.}
15 \end{figure}

```

```
1 % use package `chemmacros'
2 \begin{figure}[p]
3   \centering
4   \MOsetup{style = fancy, distance = 7cm, A0-width = 15pt, labels}
5   \begin{MOdiagram}
6     \atom[N]{left}{%
7       2p = {0;up,up,up}
8     }
9     \atom[0]{right}{%
10      2p = {2;pair,up,up}
11    }
12   \molecule[NO]{%
13     2pM0 = {1.8,.4;pair,pair,pair,up},
14     color = { 2piy*=red }
15   }
16   \EnergyAxis
17 \end{MOdiagram}
18 \caption{Part of the MO diagram of \ch{lewis{180.}{NO}.}}
19 \end{figure}
```

5 Examples

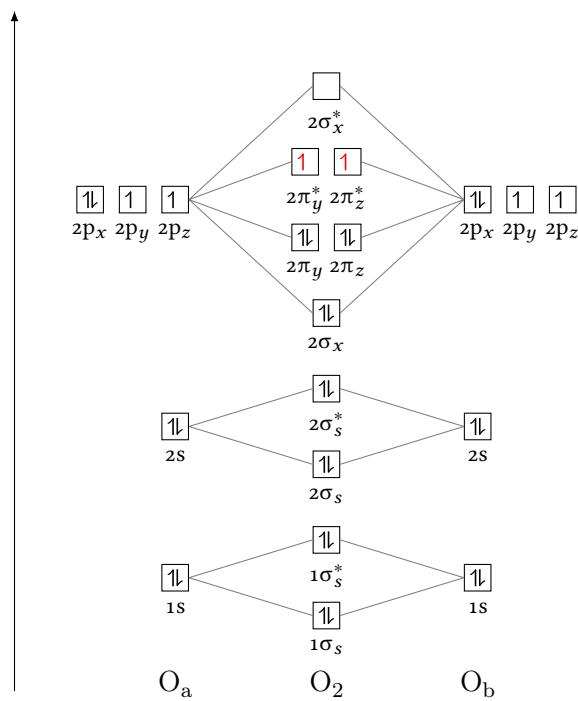


FIGURE 1: MO diagram of ${}^3\Sigma_g^-$ - O_2 .

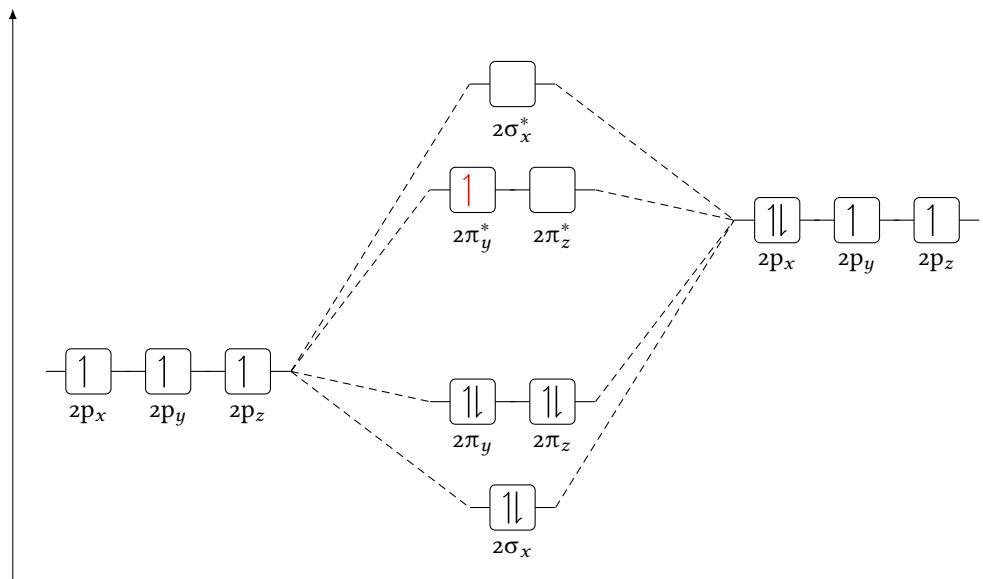


FIGURE 2: Part of the MO diagram of $\bullet\text{NO}$.

References

- [Nie14] Clemens NIEDERBERGER. chemmacros. version 4.3, Jan. 24, 2014.
URL: <http://mirror.ctan.org/macros/latex/contrib/chemmacros/>.
- [Tan10] Till TANTAU. TikZ/pgf. version 2.10, Oct. 25, 2010.
URL: <http://mirror.ctan.org/graphics/pgf/>.
- [The13a] THE LATEX3 PROJECT TEAM. l3kernel. version SVN 4582, July 28, 2013.
URL: <http://mirror.ctan.org/macros/latex/contrib/l3kernel/>.
- [The13b] THE LATEX3 PROJECT TEAM. l3packages. version SVN 4582, July 28, 2013.
URL: <http://mirror.ctan.org/macros/latex/contrib/l3packages/>.

Index

Symbols

THE LATEX3 PROJECT TEAM	2
<code>1s</code>	3, 5
<code>1sMO</code>	5
<code>2p</code>	3, 5
<code>2pMO</code>	5 f.
<code>2s</code>	3, 5
<code>2sMO</code>	5

A

<code>\AO</code>	10 ff., 14, 17, 25 f., 28 f.
<code>\AO-width</code>	14, 17
<code>\atom</code>	2–7, 9 ff., 14, 16–25, 27 ff.

C

<code>chemmacros (bundle)</code>	2
<code>color</code>	25 f.
<code>\connect</code>	12 f., 28

D

<code>distance</code>	14, 17
<code>down-el-pos</code>	15, 18, 25 f.

E

<code>el-sep</code>	15, 17
<code>\EnergyAxis</code>	26–29

H

<code>head</code>	27
-------------------	----

L

<code>\kernel (bundle)</code>	2
-------------------------------	---

\3packages (bundle)

<code>label</code>	23, 25 f.
<code>labels</code>	15, 22, 24
<code>labels-fs</code>	15, 22
<code>labels-style</code>	15, 23
<code>lines</code>	15, 19
<code>LPPL</code>	2

M

<code>\Mdiagram (environment)</code>	2–7, 9–12, 14–29
<code>\molecule</code>	4–7, 9 f., 12, 16–25, 27 ff.
<code>\Msetup</code>	14, 21, 29

N

<code>names</code>	15, 19
<code>names-style</code>	15, 20
<code>names-style-add</code>	15, 21
<code>NIEDERBERGER, Clemens</code>	1 f.

S

<code>style</code>	14 ff.
--------------------	--------

T

<code>TANTAU, Till</code>	2
<code>TikZ/pgf (package)</code>	2
<code>title</code>	27

U

<code>up-el-pos</code>	15, 18, 25 f.
------------------------	---------------